

Goodspeed

INDOOR MEL compound

(Formerly known as PORPLASTIC INDOOR MEL compound)


Sports flooring system for school and multipurpose use, mixed elastic according to EN14904

Application Fields

Sport halls

School sports halls

Multi-purpose leisure hall

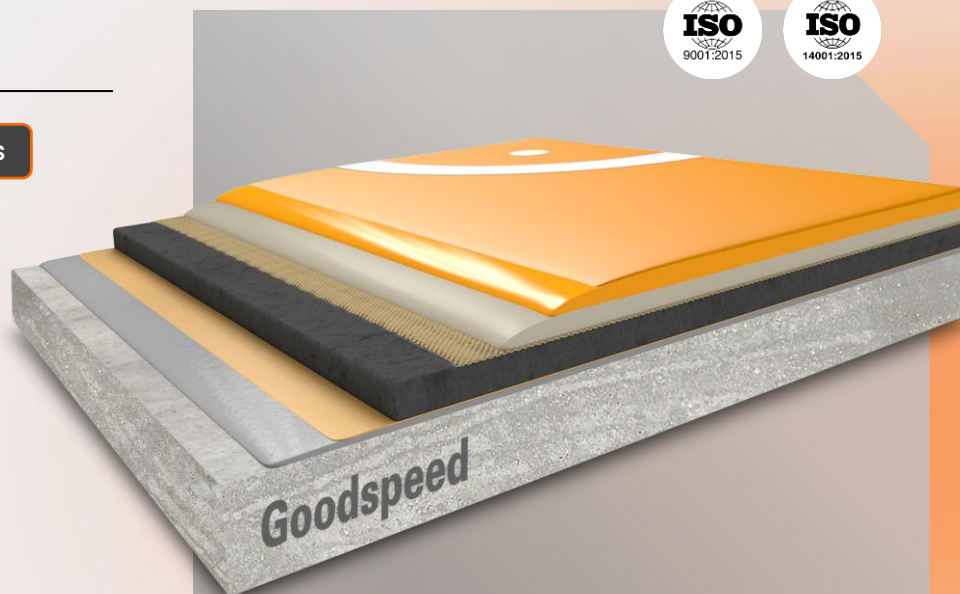

TÜV PROFICERT



EN14904 certified



Available in many colours

Performance check



Gloss of 28-30%



Ball rebound > 99%



Shock absorption 57%



Permanent Elasticity



Abrasion resistance of 15mg



Available in many colours




Water impermeable



Impact resistance of 16Nm



Sliding properties of 107



Layer		Consumption	Thickness	Application
LINE PAINT Goodspeed X8005		10 – 15 g/lfm	ca. 0.10 – 0.20 mm	Roller or brush
FLEXIBLE TOP FINISH Goodspeed S6000P		0.10 – 0.13 kg/m ²	ca. 0.05 – 0.10 mm	roller
ELASTIC LAYER Goodspeed C524		2.50 – 3 kg/m ²	ca. 2 – 3 mm	Notched squeegee
LOAD-DISTRIBUTION Goodspeed L324		2 kg/m ²	ca. 2 mm	Notched squeegee
PORE SEALER Goodspeed L375		ca. 1 kg/m ²	ca. 0.10 – 0.20 mm	Rubber squeegee or metal trowel
ELASTIC MAT+ADHESIVE Goodspeed MAT Goodspeed B976		ca. 0.80 kg/m ² (Adhesive)	ca. 10 – 12 mm (Elastic mat)	Cut and embed in fresh adhesive Notched trowel
PRIMER FLOORFINDER EP-P210		ca. 0.40 kg/m ²	ca. 0.20 mm	Roller or rubber squeegee

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.



Distributor:

Goodspeed America Inc., 24624 Interstate 45 North, Suite 200 • Spring, Texas 77386, U.S.A.

Email: bstorey@goodspeed-america.com, www.goodspeed-america.com

