

# Goodspeed *M olympic ultra*

(Formerly known as PORPLASTIC M olympic ultra)

Only two-layer full PU-bond system with coloured EPDM granules, water-impermeable

## ULTIMATE SPORT SURFACE

### Application Fields

Running tracks

Run up tracks

Athletic sport areas type A,B,C

Short distance tracks

High-performance sport

International competitions

Olympia, world championships



WA Certified

Only 2 Layers

Ultra Robust

### Performance check



WA certified  
14.1 mm



Shock absorption  
42%



Ultra elongation at  
break of 106%



Ultra robust  
tensile strength  
0.64 N/mm<sup>2</sup>



Friction of 0.67



Spike resistance



Vertical deformation  
of 2.20 mm



Environmentally  
friendly




Available in many  
colours



| Layer                                                              |                                                                                     | Consumption                                            | Thickness          | Application                                      |
|--------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------|--------------------|--------------------------------------------------|
| <b>LINE PAINT</b><br>Goodspeed X8090                               |    | 20 –30 g/lfm                                           | ca. 0.10 – 0.20 mm | Spray                                            |
| <b>UV-SEALER (optional)</b><br>Goodspeed S6020                     |    | 0.17 –0.20<br>per layer                                | ca. 0.10 mm        | Spray, In 2 layers                               |
| <b>WEARING LAYER</b><br>Goodspeed C555<br>Goodspeed EPDM (1 – 4mm) |    | ca. 3kg/m <sup>2</sup><br>3.00 net   4.00 total        | ca. 3 –5 mm        | Notched squeegee,<br>broadcast, remove<br>excess |
| <b>ELASTIC LAYER</b><br>Goodspeed C550<br>Goodspeed SBR (1 – 4mm)  |    | ca. 2.50 – 3 kg/m <sup>2</sup><br>3.50net   4.50 total | ca. 10 mm          | Notched squeegee,<br>broadcast, remove<br>excess |
| <b>PORE SEALER</b><br>Goodspeed L370                               |  | 1.10 – 1.80 kg/m <sup>2</sup><br>3.00net   3.50 total  | ca. 0.10 – 0.20 mm | Squeegee, or paving<br>machine with trowel bar   |
| <b>PRIMER (optional)</b><br>Goodspeed P270<br>(for asphalt)        |  | 0.15 – 0.20 kg/m <sup>2</sup>                          | ca. 0.10 mm        | Roll or spray                                    |

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see [www.porplastic.com](http://www.porplastic.com) or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

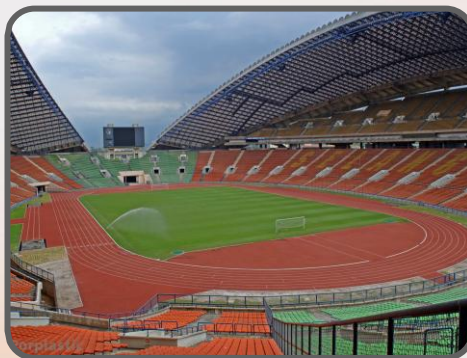

## Distributor:

Goodspeed America Inc., 24624 Interstate 45 North, Suite 200 • Spring, Texas 77386, U.S.A.

Email: [bstorey@goodspeed-america.com](mailto:bstorey@goodspeed-america.com), [www.goodspeed-america.com](http://www.goodspeed-america.com)

