

Goodspeed *SW smart*

(Formerly known as PORPLASTIC SW smart)

Sandwich construction consisting of an elastic layer, pore sealer and cast coating spread with coloured EPDM granules, water-impermeable

SMALL AREAS AND INDOOR

Application Fields

Running tracks

Run up tracks


Athletic sport areas type A,B,C

Short distance tracks

High-performance sport

International competitions

Olympia, world championships

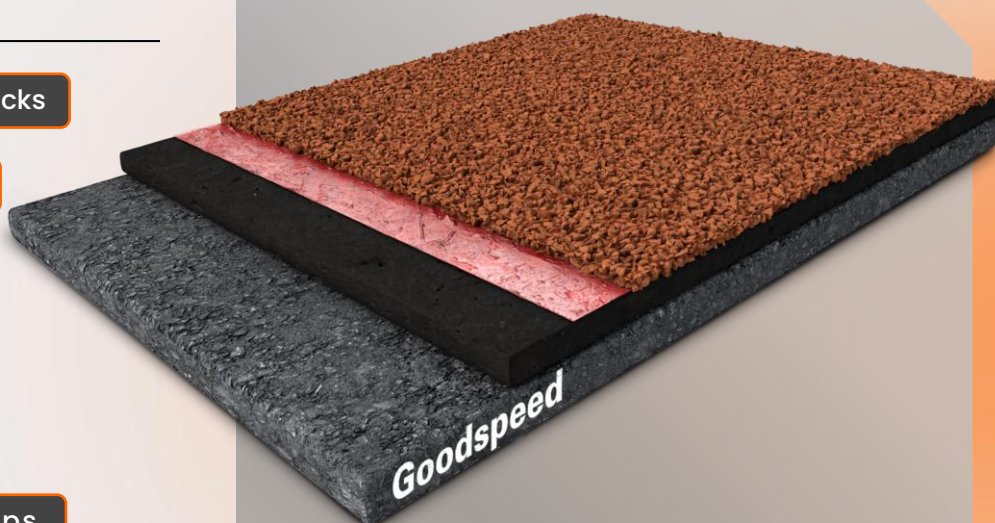

WA Certified



Elastic Mat



Water Impermeable

Performance check



WA certified
14 mm



Shock absorption
44%



Elongation at break
of 46%



Tensile strength
0.62 N/mm²



Friction of 64



Extremely spike
resistance




Vertical deformation
of 2.00 mm



Water
impermeable



Available in many
colours



Layer		Consumption	Thickness	Application
LINE PAINT (optional) Goodspeed X8090		20 –30 g/lfm	ca. 0.10 – 0.20 mm	Spray
UV-SEALER (optional) Goodspeed S6020		0.17 –0.20 per layer	ca. 0.10 mm	Notched squeegee, broadcast, remove excess
WEARING LAYER Goodspeed C570 Goodspeed EPDM (1 – 4mm)		ca. 2.20 – 2.80 kg/m ² 2.80 net 4.00 total	ca. 3 –5 mm	Squeegee, or paving machine with trowel bar
PORE SEALER Goodspeed L370		0.50kg/m ²	ca. 0.10mm	Squeegee
ELASTIC MAT + ADHESIVE Goodspeed SW Mat Goodspeed B976		- 0.30 kg/m ²	ca. 10 – 12 mm -	Paving machine
PRIMER (optional) Goodspeed P270		0.15 – 0.20 kg/m ²	ca. 0.10 mm	Roll or spray

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.



Distributor:

Goodspeed America Inc., 24624 Interstate 45 North, Suite 200 • Spring, Texas 77386, U.S.A.

Email: bstorey@goodspeed-america.com, www.goodspeed-america.com

