

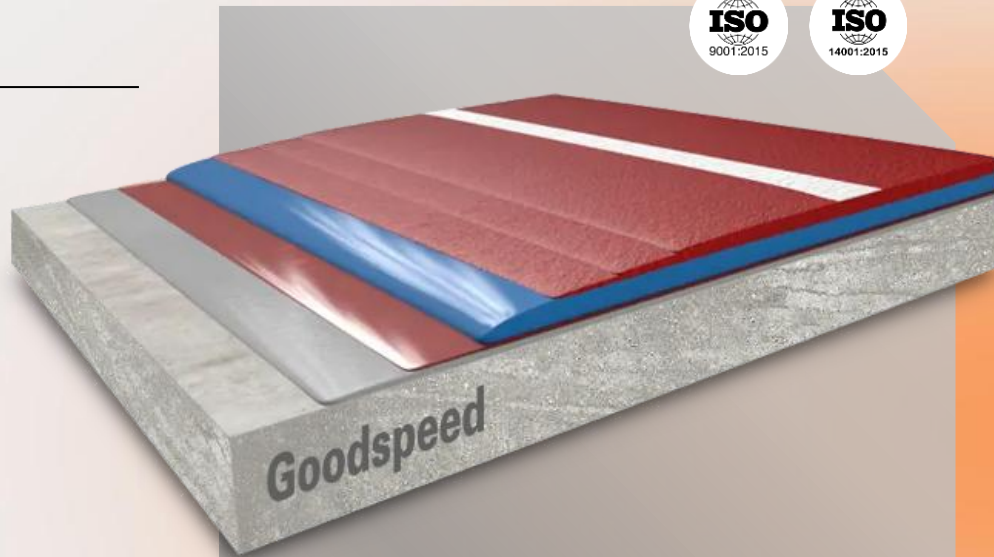
Goodspeed *TENNIS club*

(Formerly known as PORPLASTIC TENNIS club)

Tennis court flooring system specially designed for concrete sub bases

Application Fields

Tennis halls indoor/outdoor



Easy to clean



Water impermeable



Available in many colours

Performance check



Water impermeable



Good scratch and abrasion resistance



Equal ball reflection



Available in many colours



Easy to clean



Very durable



Permanent elasticity

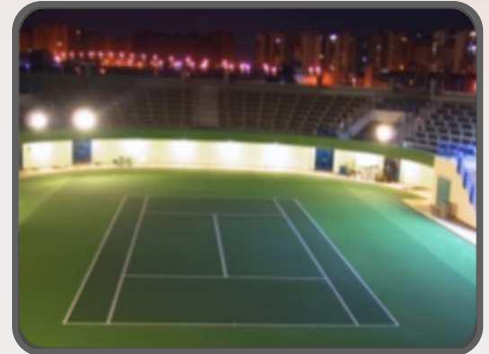
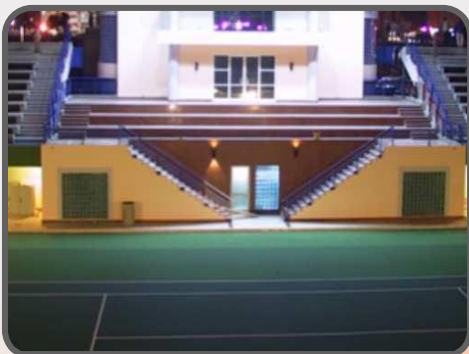


Low maintenance



Layer		Consumption	Thickness	Application
LINE PAINT Goodspeed X8050 SR		20 – 30 g per Running meter	ca. 0.10 – 0.20 mm	Roller or brush
STRUCTURED TOP FINISH Goodspeed S6085 SR		2 layers 540 g 3 layers 900 g	ca. 0.30 mm ca. 0.50 mm	Rubber squeegee
SELF LEVELING LAYER Goodspeed C524		ca. 2.0 kg/m ²	ca. 1.50 mm	Notched squeegee
SCRATCH LAYER (optional) Goodspeed C524		200 – 400 g/m ²	ca. 0.20 mm	Notched squeegee
PRIMER (concrete) FLOORFINDER EP-P210 GEBA		400 g/m ² 300 g/m ²	ca. 0.20 mm	Roller or rubber squeegee

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see www.porplastic.com or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

**Distributor:**

Goodspeed America Inc., 24624 Interstate 45 North, Suite 200 • Spring, Texas 77386, U.S.A.

Email: bstorey@goodspeed-america.com, www.goodspeed-america.com

