

# Goodspeed


## TENNIS comfort

(Formerly known as PORPLASTIC TENNIS comfort)

Tennis court flooring system for indoor and outdoor point-elastic according to EN 14904, ITF classified

### Application Fields

Tennis halls indoor/outdoor

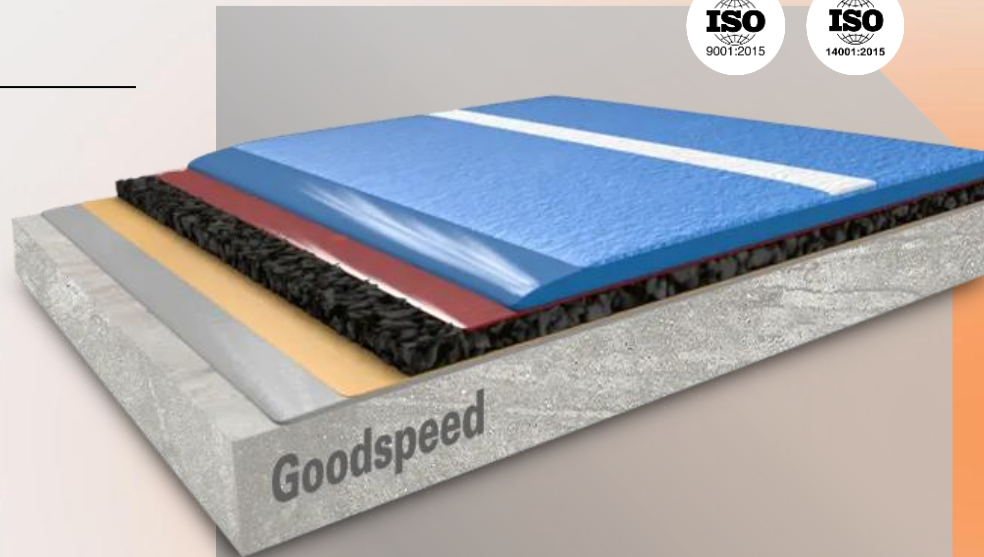

Very Durable



Low Maintenance



Equal ball reflection

### Performance check



Water impermeable



Good scratch and abrasion resistance



Low maintenance



Available in many colours



Easy to clean



Equal ball reflection



Permanent elasticity



Shock absorption of 17 - 30%




ITF certified



| Layer                                                                  |                                                                                     | Consumption                      | Thickness                  | Application                                    |
|------------------------------------------------------------------------|-------------------------------------------------------------------------------------|----------------------------------|----------------------------|------------------------------------------------|
| <b>LINE PAINT</b><br>Goodspeed X8085 SR                                |    | 20 – 30 g/lfm                    | ca. 0.10 – 0.20 mm         | Roller or brush                                |
| <b>STRUCTURED TOP FINISH</b><br>Goodspeed S6085 SR                     |    | 2 layers 540 g<br>3 layers 900 g | ca. 0.30 mm<br>ca. 0.50 mm | Rubber squeegee                                |
| <b>SELF LEVELING LAYER</b><br>Goodspeed C524                           |    | ca. 2.00 kg/m <sup>2</sup>       | ca. 1.50 mm                | Notched squeegee                               |
| <b>PORE SEALER</b><br>Goodspeed L375                                   |    | ca. 0.60 kg/m <sup>2</sup>       | ca. 0.10 – 0.20 mm         | Rubber squeegee or metal trowel                |
| <b>ELASTIC MAT + ADHESIVE</b><br>Goodspeed basic mat<br>Goodspeed B976 |   | -<br>ca. 0.80 kg/m <sup>2</sup>  | ca. 4 – 10 mm<br>-         | Cut and embed in fresh adhesive notched trowel |
| <b>PRIMER</b><br>FLOORFINDER EP-P210                                   |  | ca. 0.40 kg/m <sup>2</sup>       | ca. 1.50 mm                | Roller or rubber squeegee                      |

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all Goodspeed data sheets are updated on a regular basis it is the users' responsibility to obtain the most recent issue (see [www.porplastic.com](http://www.porplastic.com) or contact us directly). Date of issue: June 2025 – all technical information is subject to change without prior notice.

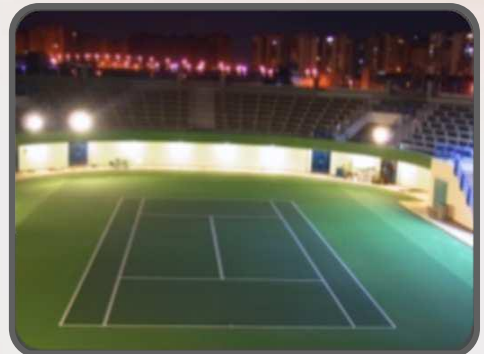

## Distributor:

Goodspeed America Inc., 24624 Interstate 45 North, Suite 200 • Spring, Texas 77386, U.S.A.  
Email: [bstorey@goodspeed-america.com](mailto:bstorey@goodspeed-america.com), [www.goodspeed-america.com](http://www.goodspeed-america.com)

