

FLOORFINDER

EXPRESS aio

Fast- and low-temperature-curing, slip-resistant polyurethane coating, for light to medium chemical and medium mechanical loads with a wide colour spectrum and various surface structures. All operations with the same product - all-in-one (aio)

Application Fields

Ramps and spindles
in parking garages

Stairways

Foyers

Exterior surfaces

Arcades

Loading ramps

Production areas

Storage areas

SYSTEM BUILD UP

FLOORFINDER

PU-S691 P


BROAD-
CASTING
LAYER



FLOORFINDER

PU-S691 P

PRIMER

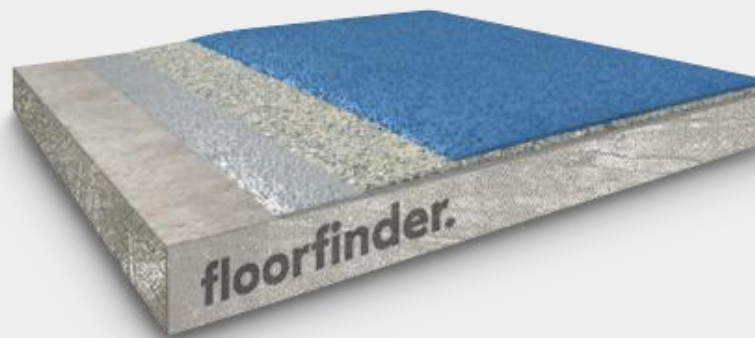

FLOORFINDER

PU-S691 P

SEALER



SYSTEM HIGHLIGHTS

1.0 – 2.5mm System thickness



UV and colour
stable



Application and
curing within a
day



Low temperature
curing –
applicable from
5°C




Low odor



Available in
many colours



Defined slip
resistance
R10 –R12

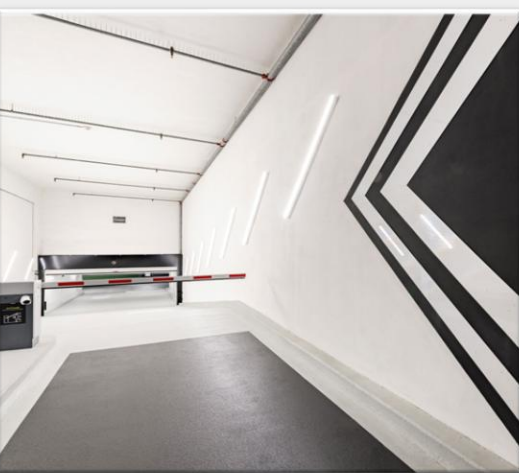

FLOORFINDER *EXPRESS aio*


Application and Consumption

Layer	Product	Consumption (kg/m ²)	Sand broadcasting (kg/m ²)	Thickness (mm)	Application
Pigmented sealer	FLOORFINDER PU-S691 P	0.5 – 1.0	none	0.35 – 0.8	rubber squeegee, roller
Broadcasting layer with quartz QNV	FLOORFINDER PU-S691 P	0.7 – 1.0	QNV2-ad (0.3 – 0.8 mm) or QNV3-ad (0.6 – 1.2 mm) in excess	1.0 – 1.8	notched trowel
Primer	FLOORFINDER PU-S691 P (Optional: Filled with 20% QNV0)	0.3 – 0.5 (without filling)	Optional QNV2-ad (0.3 – 0.8 mm) ca. 0.8 kg/m ²	0.2 – 0.4 (without filling)	rubber squeegee, roller
Substrate	Cementitious substrates according to the appropriate standards and approvals must be capable of bearing loads and be free of cracks and voids. Pull-off strength ≥ 1.5 N/mm ² , residual moisture content < 4 %-CM, with higher residual moisture and on substrates with moisture from the backside special measures must be taken or a damp proof membrane must be installed. Substrate preparation e.g. grinding or shot blasting, sweeping and vacuum-cleaning is mandatory. Consumptions are calculated with FLOORFINDER quartz sands and fillers. Usage of other quartz sands and fillers can cause changes of consumption and technical data.				
Note	Detailed application instructions are available upon request or refer to the technical product data sheet.				

System timeline (Assumed application conditions: 15°C, 40% rel. Humidity, 200m² area, ca.1h application per operation)

Standard industry floor coating

FLOORFINDER *EXPRESS aio*

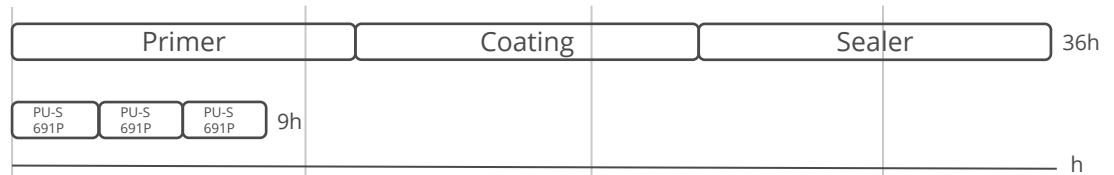

Technical Data



Property	Standard	Result
Shore-Hardness	DIN EN ISO 868	After 1d: D50 After 7d: D70
Adhesive tensile strength	DIN EN ISO 4624	$\geq 2,5$ N/mm ² (concrete failure)
Impact strength	EN 13813, tested acc. EN ISO 6272-1	\geq IR4
Abrasion resistance (Taber)	DIN ISO 9352	≤ 1400 mg (H22, 1000 cycles)
Chemical resistance	EN ISO 2812-4	Resistant against (among others): -Petrol (DIBt medium group 1) -Diesel/Heating oil (3) -Sulfuric acid 20% (10) -Detergent 50% (14)

Remark: for further information please refer to the product data sheets or contact our technical service. All data are approximate values. Therefore, no liability claims can be derived from the system data sheet. As all FLOORFINDER data sheets are updated on a regular basis it is the user's responsibility to obtain the most recent issue (see www.floorfinder.com.my or contact us directly)– all technical information is subject to change without prior notice. FLOORFINDER products are guaranteed against defective material and manufacture and are sold subject to its standard Terms and Conditions of Sale, copies which can be obtained on request.

Distributor:

Goodspeed America Inc., 24624 Interstate 45 North, Suite 200 • Spring, Texas 77386, U.S.A. | bstorey@goodspeed-america.com | www.goodspeed-america.com

Manufacturer:

FLOORFINDER ASIA SDN. BHD. – A division of VIACOR VISION AG, SWITZERLAND | No. 28, Lorong Sungai Puloh 1A/KU6 | Jalan Sungai Puloh | Batu 5 3/4 Kapar | 42100 Klang | Selangor Darul Ehsan | Malaysia | Tel: +603 3290 7644 | info@floorfinderasia.com | www.floorfinderasia.com